
BuzziCube Flat

Product Specification Sheet

This document contains technical information about the BuzziCube Flat Solo, Duo, Trio, Quatro



Sound absorbing pouf

The BuzziCube Flat makes sitting a pleasure for your eyes and your bottom. Upholstered with soft foam and Covered by a variety of BuzziSpace fabrics, it is bound to steal the show in any interior!

Design by BuzziSpace Studio

General

- ◆ BuzziCube Flat Solo, Duo, Trio, Quatro
- 🌲 Filling: Acoustic Foam
Upholstered in: Fabric, Trevira CS+ | CS, Revive 1, Velvet, Clara 2, Remix 3, Hero, Tonus 4, Memory 2
- ☁️ Dry usage
- 🔧 Assembled

Acoustics



Absorption



Diffusion



Low tone



Mid tone



High tone

Certifications



Content

Configurations	3
Components	4
Fabrics	5
Dimensions	8
Acoustics	9

Configurations

BuzziCube Flat

Solo | Duo | Trio | Quatro



Flat

Bottom in antiskid, wood or with wheels (wheels only for Solo)




Upholstery in Fabric, Trevira CS+ | CS, Revive 1, Velvet, Clara 2, Remix 3, Hero, Tonus 4, Memory 2


		Antiskid			Wood	Wheels (only for Solo)
✂	Solo:	L 46 cm	W 46 cm	H 47 cm	H 50 cm	H 50 cm
		L 18.11"	W 18.11"	H 18.50"	H 19.69"	H 19.69"
	Duo:	L 92 cm	W 46 cm	H 47 cm	H 50 cm	
		L 36.22"	W 18.11"	H 18.50"	H 19.69"	
	Trio:	L 138 cm	W 46 cm	H 47 cm	H 50 cm	
		L 54.33"	W 18.11"	H 18.50"	H 19.69"	
	Quatro:	L 184 cm	W 46 cm	H 47 cm	H 50 cm	
		L 72.44"	W 18.11"	H 18.50"	H 19.69"	

		Antiskid		Wood		Wheels (only for Solo)	
⚖	Solo:	4 kg	8.82 lbs	6 kg	13.23 lbs	6 kg	13.23 lbs
	Duo:	7,5 kg	16.53 lbs	11,5 kg	25.35 lbs		
	Trio:	10,8 kg	23.81 lbs	17,5 kg	38.58 lbs		
	Quatro:	14,5 kg	31.97 lbs	22,6 kg	49.82 lbs		


Solo




Duo



Trio




Quatro

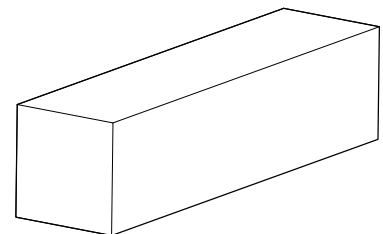

Components


Bottom

Antiskid




Bottom:
Antiskid

Wood

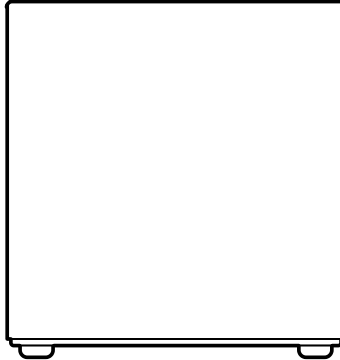

Bottom:
Black MDF
4 Plastic Feet

Wheels (only for Solo)

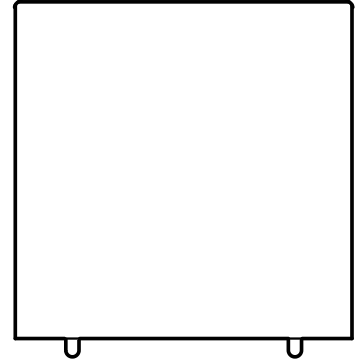


Bottom:
Poplar multiplex
MDF covered with antiskid
4 Wheels
(load capacity: 40 kg | 88.18 lbs
per wheel)



Fabrics

Fabric



Category A

Composition 70% Recycled Wool, 25% Recycled Polyacryl,
5% Recycled Other Fabrics

Weight 405 g/m² | 11.94 oz/yd²

Abrasion resistance 40.000 Martindale, 50,000 Wyzenbeek

Flammability EU: EN 1021.1/2006 | BS EN 1021.1/2006 (cigarette).
EN 1021.2/2006 | BS EN 1021.2/2006 (match)
USA: CAL TB 117 | ASTM E84 CLASS A


Fastness to light EU: 4 | USA 4

Fastness to rubbing EU: Wet 3-4 | Dry 4-5

Fastness to crocking USA: Wet 5 | Dry 5



Trevira CS+ | CS



Category A

Weight 420 g/m² | 12.39 oz/yd²

Composition 100% Polyester, Trevira CS

Abrasion resistance 100.000 Martindale, 90,000 Wyzenbeek

Flammability BS 5852 part II: CRIB 5 | BS 7176 Medium Hazard
USA: CAL TB 117 | M1 | B1 | EN 1021/1-2 | C1 |
IMO Res. A652 (16)

Fastness to light EU: 6 | USA 5


Fastness to rubbing EU: Wet 4-5 | Dry 4-5

Fastness to crocking USA: Wet 5 | Dry 5



Revive 1

kvadrat



Category A

Composition 100% recycled polyester FR

Weight 430 g/lin.m

Abrasion resistance 60.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | DIN 4102 B1 | Önorm B1/Q1
UNI 9175 1IM | US Cal. Tech. Bull. 117
IMO A.652 (16)


Fastness to light Note 5-7, ISO 105-B02

Fastness to rubbing (ISO) dry 5, wet 4-5

Pilling Note 4-5, EN ISO 12945




Velvet



Category B
Composition 100% PES
Weight 375 g/m² | 11.06 oz/yd²
Abrasion resistance > 100.000 Martindale
Fastness to light EU: 4-5
Fastness to rubbing EU: Wet 4 | Dry 4-5
Pilling EU: 4-5

Clara 2

kvadrat



Category B
Composition 92% new wool, 8% nylon
Weight 400 g/lin.m
Abrasion resistance 80.000 Martindale rubs, EN ISO 12947
Flammability EN 1021-1/2 | BS 5852, ignition source 2-3 | DIN 4102 B2
NF D 60 013 | UNI 9175 1IM | US Cal. Tech. Bull. 117, Sec. E
NFPA 260 | IMO A.652(16)
Fastness to light Note 5-7, ISO 105-B02
Fastness to rubbing (ISO) dry 4-5, wet 4
Pilling Note 4, EN ISO 12945



Remix 3

kvadrat




Category B
Composition 90% new wool, 10% nylon
Weight 415 g/lin.m
Abrasion resistance 100.000 Martindale rubs, EN ISO 12947
Flammability EN 1021-1/2 | BS 5852 part 1
Önorm B1/Q1 | NF D 60 013 | UNI 9175, 1IM
AS/NZS 1530.3 | Cal. Tech. Bull. 117-2013
NFPA 260 | IMO FTP Code 2010:Part 8
Fastness to light Note 5-7, ISO 105-B02
Fastness to rubbing (ISO) dry 4-5, wet 4
Pilling Note 4, EN ISO 12945



Hero

kvadrat



Category C

Composition 96% new wool, 4% nylon

Weight 580 g/lin.m

Abrasion resistance 45.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | DIN 4102 B2 | NF D 60 013
UNI 9175 1IM | US Cal. Bull. 117-2013 | NFPA 260
IMO A.652 (16)

Fastness to light Note 5-6, ISO 105-B02

Fastness to rubbing (ISO) dry 4-5, wet 4-5

Pilling Note 3-4, EN ISO 12945



Tonus 4

kvadrat



Category D

Composition 90% new wool, 10% Helanca

Weight 665 g/lin.m

Abrasion resistance 100.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | BS 5852 part 1 | DIN 4102 B2
Önorm B1/Q1 | NF D 60 013 | UNI 9175 1IM
US Cal. Bull. 117-2013 | NFPA 260 | IMO A.652 (16)

Fastness to light Note 5-7, ISO 105-B02


Fastness to rubbing (ISO) dry 3-5, wet 3-5

Pilling Note 3, EN ISO 12945



Memory 2

kvadrat



Category E

Composition 100% Trevira CS

Weight 700 g/lin.m

Abrasion resistance

35.000 rubs acc. to the Martindale method, EN ISO 12947

Flammability EN 1021-1/2 | DIN 4102 B1 | Önorm B1/Q1
NF D 60 013 | NF P 92 507 M1 | UNI 9175 1IM
UNI 9177 classe 1 | US Cal. Tech. Bull. 117
IMO A.652 (16)

Fastness to light Note 5-8, ISO 105-B02


Fastness to rubbing (ISO) dry 4-5, wet 4-5

Pilling Note 4, EN ISO 12945




Dimensions


Solo




Duo



Trio

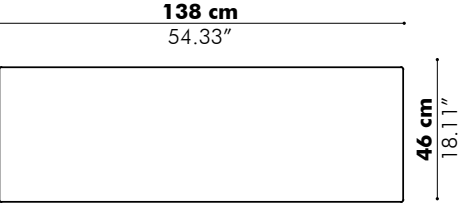

Quatro

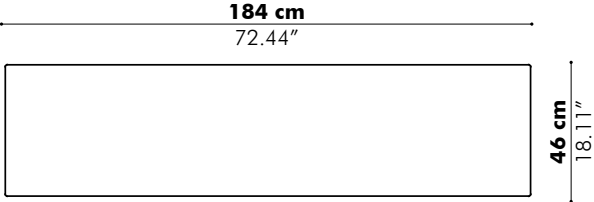

Antiskid



Wood




Wheels



Acoustics

BuzziCube Flat

Equivalent sound absorption area in m² per object

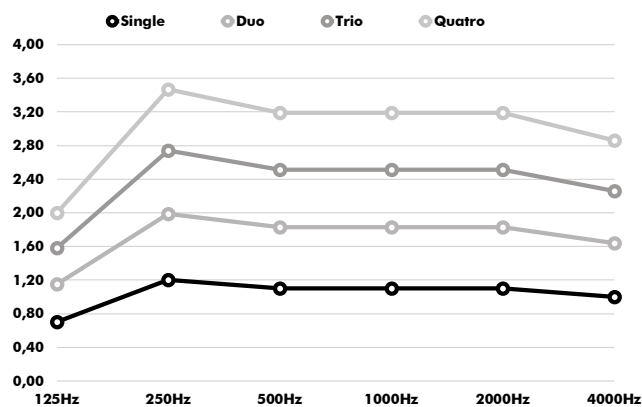

Hz	Solo Aeq/m ²	Duo Aeq/m ²	Trio Aeq/m ²	Quatro Aeq/m ²
125	0.70	1.15	1.58	2.00
250	1.20	1.99	2.74	3.47
500	1.10	1.83	2.51	3.19
1000	1.10	1.83	2.51	3.19
2000	1.10	1.83	2.51	3.19
4000	1.00	1.64	2.26	2.86

BuzziCube 3D

Product Specification Sheet

This document contains technical information about the BuzziCube 3D Solo, Duo, Trio, Quatro



bof[®]



Sound absorbing 3D pouf

A high-design pouf that is unique in its class thanks to its revolutionary form and high-tech production process. The 3D foam covered with a variety of BuzziSpace fabrics gives it a unique touch.

Design by BuzziSpace Studio

General

◆ BuzziCube 3D Solo, Duo, Trio, Quatro

Filling: Acoustic Foam

Cover: Acoustic 3D foam

🌲 Upholstered in: Fabric, Trevira CS+

Pattern: 1 SQ, 4 SQ, 16 SQ

☁️ Dry usage

🔑 Assembled

Acoustics



Absorption



Diffusion

Certifications



Content

Configurations	3
Patterns	4
Components	4
Fabrics	5
Dimensions	6
Acoustics	7

Configurations


BuzziCube 3D

- ◆ Solo | Duo | Trio | Quatro
- ◆ 3D 1 SQ | 4 SQ | 16 SQ
- ◆ Bottom: antiskid, wood or with wheels (wheels only for Solo)
- ◆ Upholstery in Fabric, Trevira CS+


			Antiskid	Wood	Wheels (only for Solo)
✂	Solo:	L 50 cm L 19.69"	W 50 cm W 19.69"	H 47 cm H 18.50"	H 50 cm H 19.69"
	Duo:	L 94 cm L 37.01"	W 50 cm W 19.69"	H 47 cm H 18.50"	H 50 cm H 19.69"
	Trio:	L 138 cm L 54.33"	W 50 cm W 19.69"	H 47 cm H 18.50"	H 50 cm H 19.69"
	Quatro:	L 182 cm L 71.65"	W 50 cm W 19.69"	H 47 cm H 18.50"	H 50 cm H 19.69"

		Antiskid	Wood	Wheels (only for Solo)
⚖	Solo:	4 kg 8.82 lbs	6 kg 13.23 lbs	Solo: 6 kg 13.23 lbs
	Duo:	7,5 kg 16.53 lbs	11,5 kg 25.35 lbs	
	Trio:	11 kg 24.25 lbs	17,5 kg 38.58 lbs	
	Quatro:	14,5 kg 31.97 lbs	22,6 kg 49.82 lbs	


Solo




Duo



Trio




Quatro

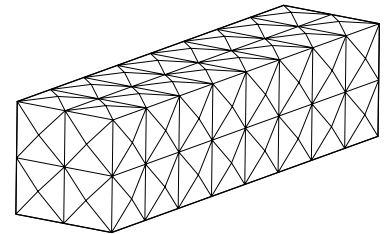


Patterns


1 SQ



4 SQ




16 SQ



Components


Bottom

Antiskid

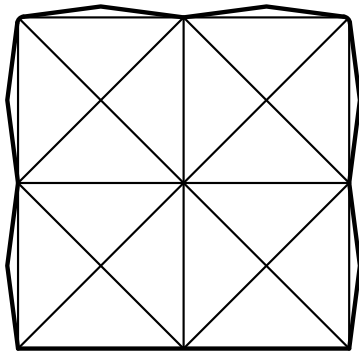


Bottom:
Antiskid

Wood

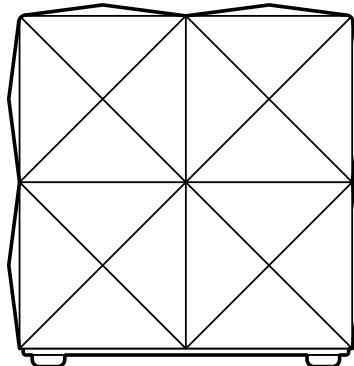

Bottom:
Black MDF
4 Plastic Feet

Wheels (only for Solo)

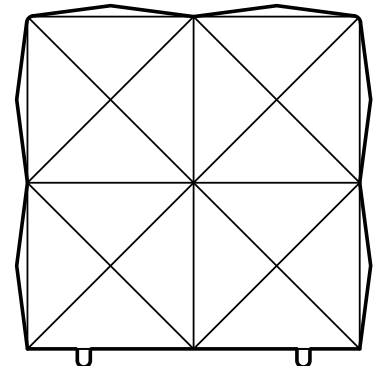


Bottom:
Poplar multiplex
MDF covered with antiskid
4 Wheels
(load capacity: 40 kg | 88.18 lbs
per wheel)



Fabrics

Fabric



Category A

Composition 70% Recycled Wool, 25% Recycled Polyacryl,
5% Recycled Other Fabrics

Weight 405 g/m² | 11.94 oz/yd²

Abrasion resistance 40.000 Martindale, 50,000 Wyzenbeek

Flammability EU: EN 1021.1/2006 | BS EN 1021.1/2006 (cigarette),
EN 1021.2/2006 | BS EN 1021.2/2006 (match)
USA: CAL TB 117 | ASTM E84 CLASS A


Fastness to light EU: 4 | USA 4

Fastness to rubbing EU: Wet 3-4 | Dry 4-5

Fastness to crocking USA: Wet 5 | Dry 5



Trevira CS+



Category A

Weight 420 g/m² | 12.39 oz/yd²

Composition 100% Polyester, Trevira CS

Abrasion resistance 100.000 Martindale, 90,000 Wyzenbeek

Flammability BS 5852 part II: CRIB 5 | BS 7176 Medium Hazard
USA: CAL TB 117 | M1 | B1 | EN 1021/1-2 | C1 |
IMO Res. A652 (16)

Fastness to light EU: 6 | USA 5


Fastness to rubbing EU: Wet 4-5 | Dry 4-5

Fastness to crocking USA: Wet 5 | Dry 5




Dimensions


Solo




Duo




Trio

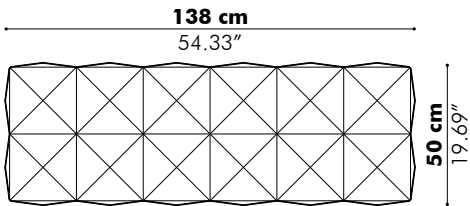


Quatro

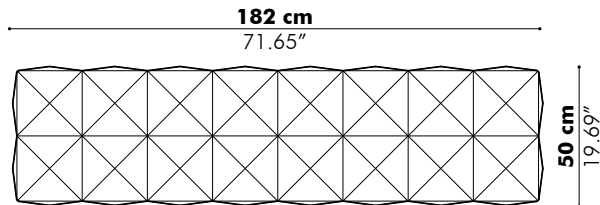


Antiskid



Wood




Wheels



Acoustics

BuzziCube 3D

Equivalent sound absorption area in m² per object

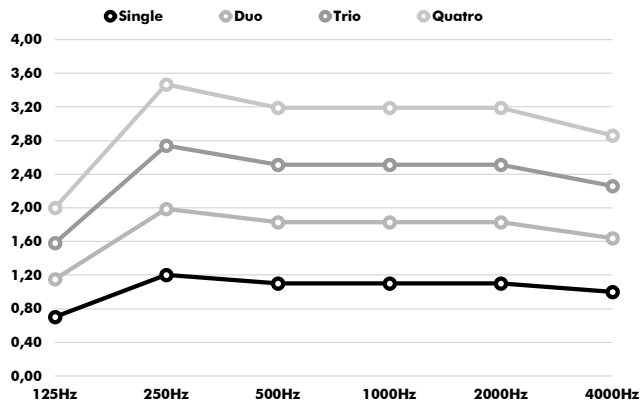

Hz	Solo Aeq/m ²	Duo Aeq/m ²	Trio Aeq/m ²	Quatro Aeq/m ²
125	0.70	1.15	1.58	2.00
250	1.20	1.99	2.74	3.47
500	1.10	1.83	2.51	3.19
1000	1.10	1.83	2.51	3.19
2000	1.10	1.83	2.51	3.19
4000	1.00	1.64	2.26	2.86